

# MOEN® 摩恩

## Specifications

### DESCRIPTION

- G1/2 inlet connections
- Metal construction with various finishes identified by suffix
- Temperature range: 0.1Mpa,  $18^{\circ}\text{C} \leq T \leq 50^{\circ}\text{C}$  (Cold:  $10^{\circ}\text{C} \sim 15^{\circ}\text{C}$ , Hot:  $60^{\circ}\text{C} \sim 65^{\circ}\text{C}$ )

### OPERATION

- Controlled by induction

### FLOW


- Water flowrate is about 1.98L /min to 4.5 L/min at 0.1 MPa.
- Water flow difference is limited to 1.98 L/min minimum from 0.1 MPa to 0.3 MPa

### STANDARDS

- Designed to meet CJ/T 164 ; GB 25501(Grade 1)

### WARRANTY


- 5 years limited warranty against leaks and drips
- 2 year warranty against electronic operation

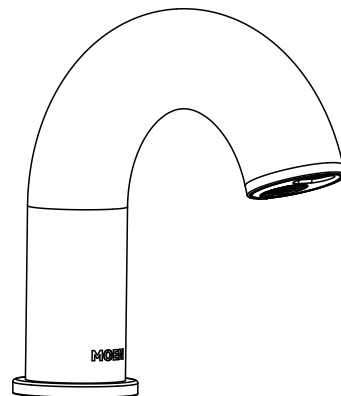

### Sensor

### Single-Mouth Sensor Lavatory Faucet

MODELS: GN86120A series

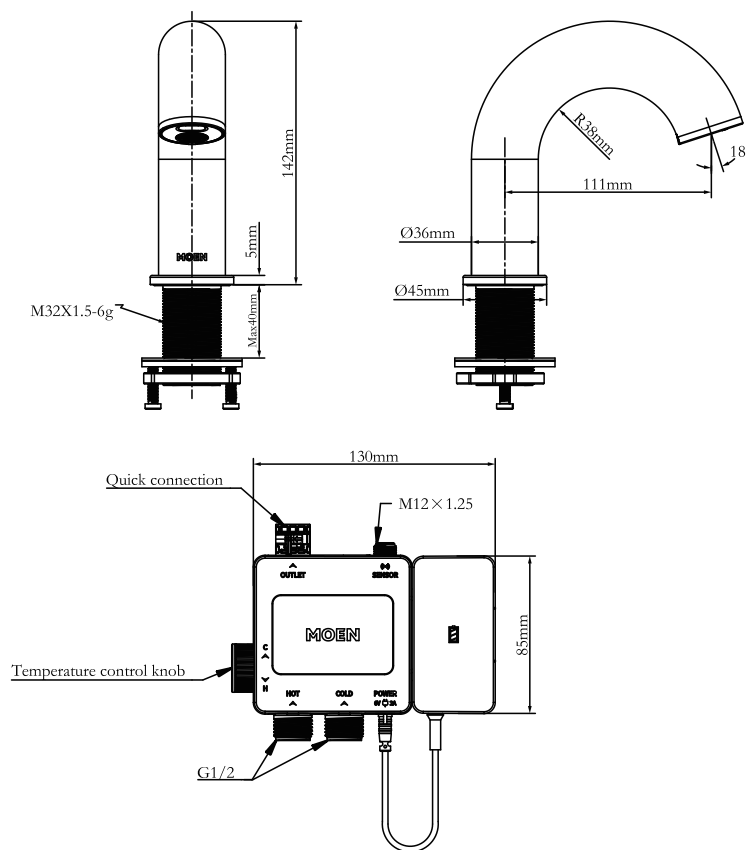

CRITICAL DIMENSIONS DO NOT SCALE