Specifications

MOEN®摩恩

DESCRIPTION

- G1/2 inlet connections
- Metal construction with various finishes identified by suffix

OPERATION

• Controlled by induction

FLOW


- Water flowrate is about 1.98L /min to 4.5 L/min at 0.1 MPa.
- Water flow difference is limited to 1.98 L/min minimum from 0.1 Mpa to 0.3 MPa

STANDARDS


• Designed to meet CJ/T 164, GB 25501(Grade 1)


WARRANTY

- 5 years limited warranty against leaks and drips
- 2 year warranty against electronic operation



Sensor
Single-Mouth Sensor Lavatory Faucet
MODELS: GN86230series

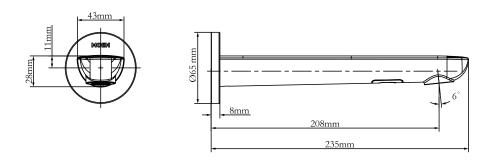



CRITICAL DIMENSIONS DO NOT SCALE