

- 釉面陶瓷小便器
- 产品规格: L:345 × W:385 × H:1100(mm)
- 给排水方式: 后进地排
- 冲水方式: 内置感应式 (感应冲水一次, 离开冲水一次)
- 冲水周期: 一个周期两段冲水
- 启动压力 (感应阀能够正常开启和关闭的水压范围): 0.05MPa~0.8MPa
- 推荐工作压力: 0.1MPa (动压) ~0.5MPa (静压)
- 小便器感应冲水阀供水管道: 正常使用最小流量>0.3L/S
- 名义用水量: ≤1.5L(一个周期)
- 水效等级: 2级
- 感应时间: 2秒
- 感应距离: 67 ± 5cm (对标准白板)
- 电源电压: DC6V或AC220




型号: SW6152HSG

- GB/T 6952-2015 《卫生陶瓷》
- CJ/T 194-2014 《非接触式给水器具》

* 图中所示皆为参考尺寸

SKU编号	冲洗阀	感应器	推荐冲洗阀
SW6152HPG	√	√	已内置

() 内的数值为推荐尺寸

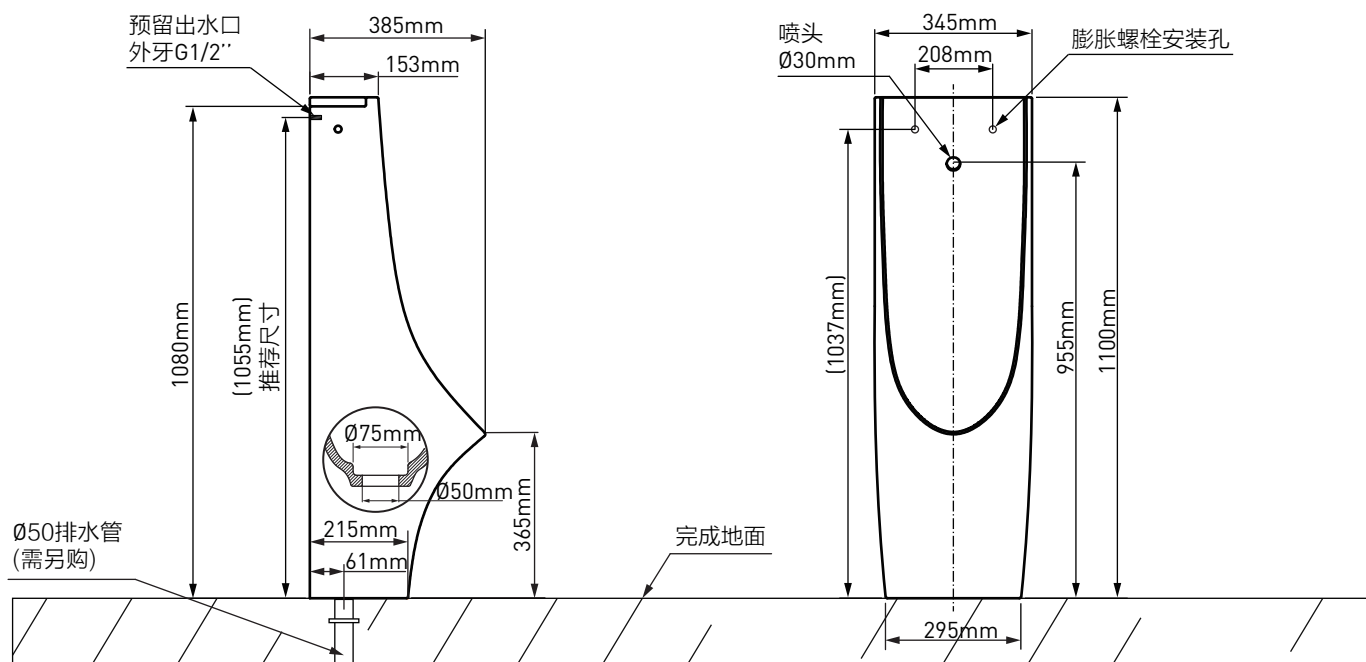

CRITICAL DIMENSIONS DO NOT SCALE

DESCRIPTION

- Glazed ceramic urinals
- Product specifications: L:345× W:385 × H:1100(mm)
- Water supply and drainage mode: Rear supply and ground drain
- Flushing mode: Built-in Sensor (Sensor work flush once, leave flush once)
- Flush Cycle: Twice flushing a cycle
- Working Pressure Range (The water pressure range that the induction valve can normally open and close) : 0.05MPa~0.8MPa
- Recommend Working Pressure Range: 0.1MPa (Dynamic Pressure) ~ 0.5MPa (Static Pressure)
- Urinal touchless flush valve supply line: Minimum flow under normal use> 0.3L/s
- Flow rate: ≤1.5L/A cycle
- Water efficiency rating: Level 2
- Sensing time: 2s
- Sensor range: 67±5cm (for standard white board)
- Supply voltage: DC6V or AC220V



KERRY

Ceramic Urinal

MODELS: SW6152HSG

EXECUTIVE STANDARD


- GB/T 6952-2015 Sanitary Ceramics
- CJ/T 194-2014 Non-contact Water Supply Devices

NOTE: When choosing angle valve and hose, please use recommendations or consult a Moen dealer or call the Moen hotline.

* All shown in the picture are reference dimensions

SKU NO.	Flush Valve	Sensor	Recommended Flush Valve
SW6152HPG	✓	✓	Built into the product

Values in () are recommended dimensions

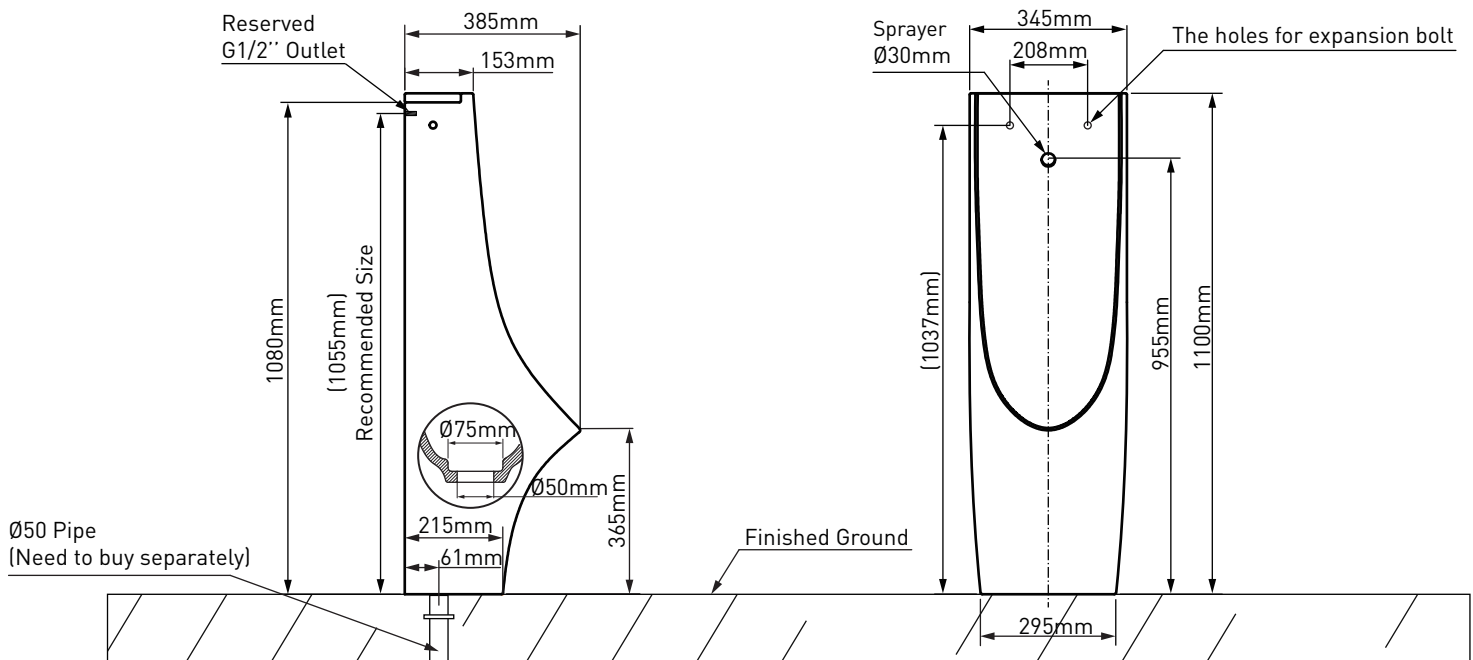

CRITICAL DIMENSIONS DO NOT SCALE